

Tiesse
Innovation made in Italy

Imola

x872-IKF-IK2W

Ultra broadband router
Fiber - eVDSL - Dual Wi-Fi - LTE



Datasheet

www.tiesse.com


Tiesse

Innovation made in Italy®

Imola

x872-IKF-IK2W

Ultra broadband router
Fiber - eVDSL
Dual Wi-Fi - LTE

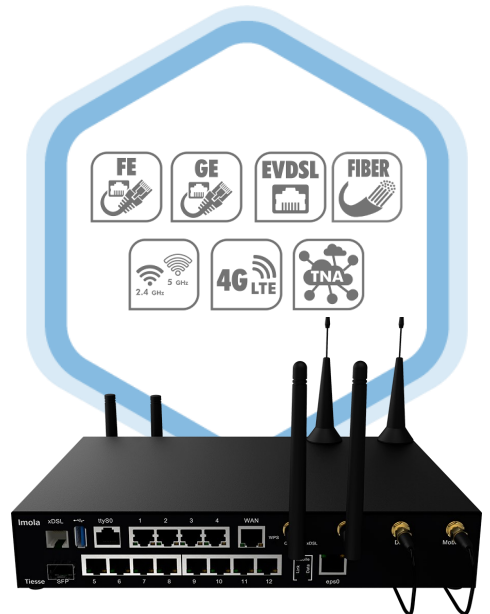

The **Imola x872 series** are an innovative line of routers with VDSL Enhanced ultra broadband connectivity and fiber, with 14 Ethernet ports (5 Gigabit and 9 Fast Ethernet) and Wi-Fi.

The routers are certified and used in the networks of the main telecommunications operators: the series is particularly suitable for use in business applications where safety, service continuity and network performance are of primary importance.

They support fixed and mobile broadband connectivity in a single all-in-one device, integrating routing, switching and modem functionality.

KEY BENEFITS

- ⇒ Security
- ⇒ Carrier grade reliability of hardware and software
- ⇒ Quality of Service (QoS)
- ⇒ Robustness (fanless, internal power supply, metal chassis, operation at extended temperature ranges)
- ⇒ Zero Touch provisioning
- ⇒ Factory pre-configurations, differentiated by customer
- ⇒ 100% of the devices is tested in the factory (including SIMs for 4G models)
- ⇒ Minimum energy consumption

SCENARIOS

The **Imola 0872** and **5872** models guarantee service continuity in distributed networks and mission-critical applications such as:

- ⇒ Services and offer profiles of Telco operators, internet and digital service providers, with fiber access, eVDSL, LTE or their combinations
- ⇒ Backup and redundancy over multiple links, optimized for branch offices and ultra-connected remote offices
- ⇒ Business applications that need always-on links and quality of service

Models



IMOLA 0872-IKF-IK2W




IMOLA 5872-IKF-IK2W




Imola - x872-IKF-IK2W series - Ultra broadband router

Fixed and mobile connectivity for business applicatons: fiber, eVDSL, Dual Wi-Fi, LTE

INTERFACES

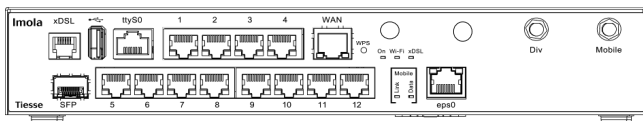

Imola 0872-IKF-IK2W

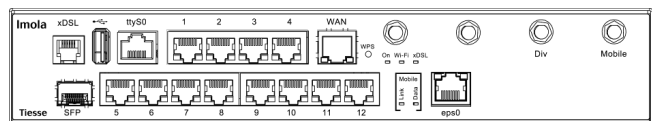

Imola 5872-IKF-IK2W

HARDWARE INTERFACES			0872-IK2W	5872-IK2W
LAN	FE	10/100 Mbps ports - RJ45 connectors	8	8
	GE	10/100/1000 Mbps ports - RJ45 connectors	4	4
	Wi-Fi	802.11 b/g/n (2.4 GHz) 2x2	1	1
		802.11 ac (5 GHz)	1	1
WAN	GE-WAN	10/100/1000 Mbps WAN port - RJ45 connector (label WAN)	1	1
	SFP WAN	SFP Cage for Fiber and GPON connections (SFP module not included)	1	1
		Full rate ADSL2/2+ / VDSL2 - RJ11 connector		
		ADSL2/2+		
		– Downstream data rate up to 24 Mbps — upstream data rate up to 3.5 Mbps		
		– Compliant to Standard G.992.1 annex A,B, C & I, G.992.2-g.Lite, G.992.3 annex A, B, I, J, M, G.992.4-g.Lite.bis, G.992.5 annex A, B, C, I, J, M, ANSI T1.413 issue2, ETSI TS 388		
	ADSL 2/2+	– ADSL-over-ISDN, ITU T-I361, ITU T-I.363.5, ITU T-I.432, ITU T-I610, ITU T-I731		
	VDSL2		1	1
	eVDSL2	VDSL2		
		– Supports for profiles VDSL2: 8 MHz to 30 MHz		
		– Complaint to G.Vector (ITU-T G.993.5) standard		
		– Complaint to ITU-T G.998.4 G.INP standard		
		– Compatible to ADSL2 (backward compatibility)		
		eVDSL2		
		Support of 35 MHz ITU-T G993.2 Annex Q (35b or Vplus) profile with aggregate rates up to 400 Mbps		
RADIO CELLULAR	GSM /GPRS / EDGE	Frequency bands: 900 / 1800 / 1900 MHz GPRS multislots 10 - EDGE multislots 12	-	•
	UMTS / HSDPA / HSUPA / HSPA+	– Frequency bands: 900 / 2100 Mhz – HSDPA data rates up to category 20 – HSUPA data rates up to category 6	-	•
	DC-HSPA+	– 42 Mbps in download	-	•
	LTE	– Frequency bands: 800 / 900 / 1800 / 2100 / 2600 Mhz – Data rates (category 4, MIMO)* – Peak data rates 150 Mbps DL, 50 Mbps UL (actual throughput depends on actual throughput depends on network configuration, bandwidth assigned to the UE, the number of users and the RF signal conditions) – WCDMA 900/2100	-	•
CONSOLE		RJ45 connector	1	1
USB		USB 3.0 port	1	1

* category 6 and 12 available on request

FIBER ACCESS

- Single and/or multiple fiber access for LAN and WAN via optic cables
- GPON connections are supported
- Different types of transceivers supported:
 - max data rate 1000 Mbps (SX, BX, LX, ZX)
 - supported connectors: LC simplex, LC duplex, RJ45

eVDSL

Support of the new generation networks (NGN) and ensuring:

- Support for VDSL2 profiles: from 8 MHz up to 35 MHz, in accordance with ITU-T G.993.2 Annex Q standard (35b profiles or Vplus) capable of aggregating rates up to 400 Mbps
- G.Vector standard-compliant (ITU-T G.993.5)
- ITU-T G.998.4G.INP standard-compliant (impulse noise protection)
- ADSL2 compatible (backward compatibility)

4G

Frequencies

- LTE 800 / 900 / 1800 / 2100 / 2600 Mhz
- WCDMA 900 / 2100 Mhz
- EDGE / GPRS / GSM 900 / 1800 / 1900

Radio interfaces

- LTE with 150 Mbps downlink data rate and 50 Mbps uplink data rate
- HSPA+, with 21.1 Mbps in Downlink data rate and 5.7 in Uplink data rate with fallback EDGE / GPRS
- Support of Dual Cell HSPA mode
- Multiple Input/Multiple Output (MIMO) support included
- It is possible to activate and configure two or more APNs simultaneously

4G ANTENNAS

- Multiple Input / Multiple Output (MIMO) support
- 2 removable antennas (SMA male)
- Optional: outdoor high gain antennas are also available (omnidirectional and directional) for outdoor installation

BACKUP: high availability - mission critical

Seamless backup

The user doesn't notice any service interruption and the following passage to backup mode.

This passage from Standard mode to backup mode (and viceversa) is accomplished

Multiple backup

Two routers connected with VRRP creates the physical backup of both network and

Homogeneous Backup


One single router is equipped with both wired and mobile

Heterogeneous Backup

You can upgrade the devices installed base with a mobile router and use the VRRP protocol (Virtual Router Redundancy Protocol).

Zero Touch Provisioning

Imola x872-IKF-IK2W are integrated in the **TNA (Tiesse Network Architecture)** suite, which is used for the remote and automated management via WEB of the configurations and firmware releases of the installed device park.

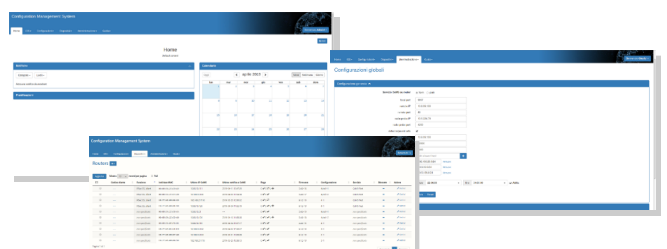

SOFTWARE features

Note: the list below is purely indicative; the features depend on the NoS version and update.

- NETWORKING**
- TCP-UDP IPv4
 - IPv6

- LAYER 2 features**
- LAN Bridging
 - VLAN support on LAN interface 802.1q in Access mode, Trunk, native VLAN and Hybrid mode
 - Layer 2 Protocol Tunneling (L2PT)
 - 802.1Q-in-802-1Q

- ROUTING & MULTICAST**
- Static, Policy routing, RIPv1, RIPv2
 - BGP-4, BGP-4+
 - OSPFv2
 - VRF Lite, Routing redistribution and tagging
 - VRRP (Virtual Routing Redundancy Protocol) with IPv4-IPv6 authentication
 - IGMP v1-v2-v3, IGMP snooping, IGMP proxying
 - Multicast routing with PIMv2 sparse-mode and PIMv2 dense-mode, MSDP
 - IEEE 802.1d (Spanning Tree Protocol)

- QoS**
- Traffic classification based on source IP, on a combination of source IP, destination IP, protocol (UDP, ICMP, TCP, etc) ports, application recognition, IP Precedence and DSCP
 - DiffServ
 - IP Precedence remarking, DSCP and CoS
 - QoS on ATM class
 - Shaping with guaranteed allocated bandwidth and redistribution of bandwidth excess
 - Committed Access Rate e Multicast rate Limit
 - Mechanisms of traffic prioritization, ability to define an arbitrary number of priority classes
 - Link aggregation IEEE 802.3ad

- SECURITY**
- NAT/PAT
 - ACLs, Stateful Firewall
 - SSL Tunnelling
 - GRE Tunnelling with keep alive and key sequence numbering (radio mobile network optimization)
 - VPN with IPSEC/ESP or IPSEC/AH IKEv1/ IKEv2

- SERVICES**
- DHCP client, DHCP server with antispoofing functions, DHCP Layer Discovery Protocol IEEE 802.1ab, DHCP relay
 - Intelligent DNS Proxy, local and remote
 - Traceroute
 - NTP Client and Server support
 - Easy VPN
 - DDns

- MANAGEMENT AND CONFIGURATION**
- SNMP v1, SNMPv2, SNMPv3
 - Telnet server with multiple simultaneous sessions
 - SSH server with multiple simultaneous sessions (SSHv2)
 - Netflow
 - IP SLA support for: One Way Delay, Round Trip Delay, Jitter, Packet Loss
 - Fault management Syslog /Trap
 - Radius Support, TACACS+
 - Tracking for backup management, commands and scheduled events
 - Software update via TFTP and FTP
 - Configuration via command Line Interface (CLI), Text/Menu oriented and Telnet
 - TNA (Tiese Network Architecture) suite for auto-provisioning and remote automated management
 - Management of an arbitrary number of configurations



Imola 0872-IKF-IK2W



Imola 5872-IKF-IK2W

SYSTEM FEATURES

POWER

AC/DC adapter (internal Universal 100-240 VAC)
Power Switch ON/OFF

Optional:
DC/DC 12V or DC/DC 24V-48V version

CONSUMPTION

<= 12 W (full configuration)

ENVIRONMENT

Operating temperature:
-25° C / +70° C (96 hours)

Storage temperature:
-40° C / +70° C

Max operating humidity:
93% (non condensing)

PROCESSOR

RISC Network processor

MEMORY

DRAM 256 MB

FLASH MEMORY

256 MB

EXTERNAL HARDWARE FEATURES

Material Metal - black color

Radio WLAN


4 external removable antennas for IK2W models
SMA male connectors

Antennas

4G Radio cellular (5872 model)
2 x external removable antennas
SMA male connectors

Mounting Desktop / horizontal plane


SIZE

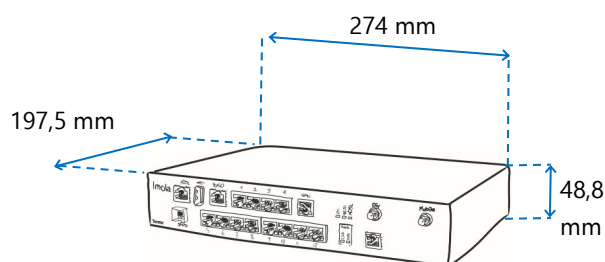

STANDARD WEIGHT

1950 gr ±10%

ADD-ONS

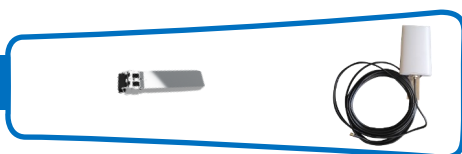

Various accessories are available for the Imola series, such as rack mounting kits, SFP transceiver modules and omnidirectional and directional antennas, which can also be used outdoors (for models with cellular connectivity).

Refer to the specific documentation, available on the company website www.tiesse.com

LED INDICATORS

Status LED 1 x power / operative status

Ethernet 2 x operative status - for each port

xDSL 1 x connection status

Wi-Fi 1 x radio signal activity

Radio cellular (5872 model)
1 x radio-cellular connection status
1 x radio-cellular data activity

TECHNICAL SUPPORT

Tiesse provides the user with two sites that are constantly updated:

Support.tiesse.com: the site with technical documentation, assembly instructions, software updates, and how to request technical support.

Wiki.tiesse.com: the site with manuals, instructions for installation, case studies, scenarios, FAQs, etc.

Tiesse

Innovation made in Italy®

Tiesse is a totally Italian company with more than 25 years' experience in the design, development and production of network equipment and IoT devices, suitable for use in mission-critical and industrial scenarios. Tiesse's most successful series, Imola, Lipari and Levanto, are innovative, competitive and certified, and are present in the networks of the major telecommunications operators, in the energy sector, large-scale distribution and vertical sectors, both in the Italian and foreign markets.


Further information on Tiesse solutions can be found on the company website www.tiesse.com.



Info: mail@tiesse.com

Marketing & Sales: marketing@tiesse.com

www.tiesse.com

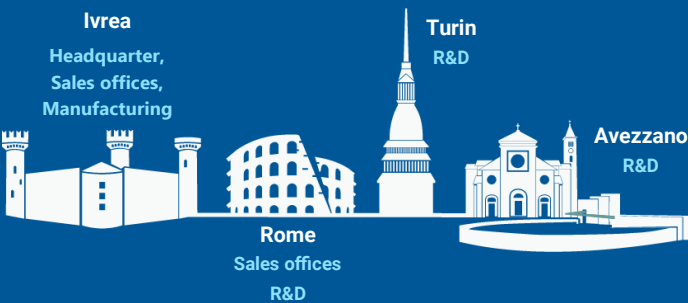

Via Asti 4
10015 Ivrea (TO)
Italy

Viale L. Gaurico 9/11
00143 Roma EUR
Italy

Via Livorno 60
10144 Torino (TO)
Italy

Via C. Corradini 80
67051 Avezzano (AQ)
Italy

Tel +39.0125230544
Fax +39.0125631923

Tel +39.0654832203
Fax +39.0654834000

© Copyright Tiesse S.p.A.

Any disclosure, derivation or reproduction of this document, even partial, is strictly prohibited without prior written authorization by Tiesse S.p.A.

Disclaimer

The informations in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Tiesse may change the informations at any time without notice.

Ver. ENG 170924

